

MS907

Skid Steer & Backhoe




The aggressive, self-cleaning tread design & side wall protection provides high traction and durability in tough & demanding applications.

- Ultra wear & cut resistant tread compound
- Self-cleaning, non-directional tread design with mud breakers
- Increased stability and stiffness
- Reinforced construction with high ply rating
- Excellent traction with the deep L5 pattern
- Extraordinary puncture resistance

Applications



Footprint

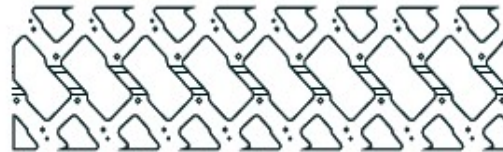

Size	PR	Type	Rim Width	Load Capacity at 10 Km/h	unit	Tread Depth	Section Width (SW)	Overall Diameter (OD)
23x8.50-12	8	TL	7JA	TBC	in.	TBC	TBC	TBC
					mm	TBC	TBC	TBC
27x8.50-15	10	TL	7JA	TBC	in.	TBC	TBC	TBC
					mm	TBC	TBC	TBC
10-16.5	14	TL	8.25	TBC	in.	44/32	10.9	31.3
					mm	35	278	795
12-16.5	14	TL	9.75	TBC	in.	44/32	13.0	33.1
					mm	35	330	842
14-17.5	16	TL	10.50	TBC	in.	TBC	TBC	TBC
					mm	TBC	TBC	TBC
12.5/80-18	14	TL	11.00	TBC	in.	TBC	TBC	TBC
					mm	TBC	TBC	TBC
12.5/80-18	16	TL	11.00	TBC	in.	TBC	TBC	TBC
					mm	TBC	TBC	TBC
16.9-28	14	TL	W15L	TBC	in.	TBC	TBC	TBC
					mm	TBC	TBC	TBC