


## EarthForce Solid Press-on Tires

With sidewalls that are designed to prevent cuts and cracks in aggressive terrain, EarthForce solid press-on tires offer a durable, cost efficient solution for your equipment.

The air-cushioned ride eases machine shock for maximum performance and driver comfort with a partially pneumatic tire design. They are created with heavy duty rubber compounds for increased service life.

- Deep lug treads provide traction in an assortment of terrains
- Great shock absorption provides machine longevity and increased operator comfort
- Super smooth tires also feature air-cushioned design
- Rimless replacement tires available
- Easy installation

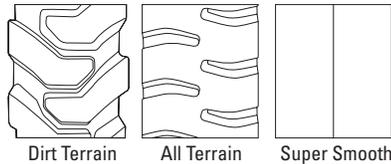

Style	Pneumatic Equivalent	Part No.	Base	Outside Dia.		Tire Width		Bolt Circle Dia.		Bolt Hole Dia.		No. of Bolt Holes	Max. Load lb.	Weight	
				in.	mm	in.	mm	in.	mm	in.	mm			lb.	kg.
Dirt Terrain with Rim	8.5 x 12	7023560	Left	23	580	8	203	4.5	114.3	9/16	15.1	5	3310	101	46
		7023561	Right												
Dirt Terrain with Rim	27 x 8.5 x 15	7023562	Left	27	675	8	203	6.0	153	5/8	16	6	4410	143	65
		7023563	Right												
Dirt Terrain with Rim	8.5 x 15	6988683	Left	30	762	8	203	6	153	5/8	15.7	6	4190	160	72.5
		6988684	Right												
without rim		6988682	-												
Dirt Terrain with Rim	10 x 16.5	6988680	Left	30	762	8	203	8	203	11/16	17.2	8	4190	160	72.5
		6988681	Right												
without rim		6988682	-												
Non-Marking Dirt Terrain with Rim	10 x 16.5	7022983	Left	30	762	10	254	8	203	11/16	17.2	8	4850	180	81.5
		7022984	Right												
Dirt Terrain with Rim	10 x 16.5	6988512	Left	30	762	10	254	8	203	11/16	17.2	8	4850	180	81.5
		6988513	Right												
Black without Rim		6988514	-												
Super Smooth w/Rim	10 x 16.5	6988510	-	31.5	800	8	203	8	203	11/16	17.2	8	5370	215	97.5
		6988511	-												
Dirt Terrain with Rim	12 x 16.5	6988524	Left	32.25	820	15	381	8	203	11/16	17.2	8	11,020	350	157.5
		6988525	Right												
without Rim		6988526	-												
Non-Marking Dirt Terrain with Rim	12 x 16.5	7022985	Left	33	838	12	305	8	203	11/16	17.2	8	8270	250	113
		7022986	Right												
Dirt Terrain with Rim	12 x 16.5	6988515	Left	33	838	12	305	8	203	11/16	17.2	8	8270	250	113
		6988516	Right												
Black without Rim		6988517	-												
All Terrain with Rim	12 x 16.5	6988518	-	33	838	12	305	8	203	11/16	17.2	8	8270	283	128
		6988520	-												
Dirt Terrain with Rim	14 x 17.5	6988947	Left	36.5	927	14	356	8.75	223	1	25.4	10	10,580	420	190.5
		6988948	Right												
without Rim		6988532	-												
Dirt Terrain with Rim	14 x 17.5	6988521	Left	36.5	927	14	356	8	203	11/16	17.2	8	10,580	420	190.5
		6988522	Right												
without Rim		6988523	-												

Equipment height may vary with some styles of EarthForce solid press-on tires.

Measurements are in inches unless otherwise noted. Use tires with the correct load rating for proper operation. DO NOT mix brands of tires used on the same equipment. Check tires regularly for wear and damage. The rim flange must be cleaned and free of rust. WARNING: AVOID INJURY OR DEATH. Do not attempt to mount, or repair, a tire on the rim. This must be done by qualified personnel with the proper equipment. Failure to use correct tire mounting procedure can result in injury or death.